


2.3 VENTILATION CAP (SAFETY VALVE)

The safety valve is made of special rubber.

It opens when there is excessive gas caused by internal pressure from overcharging and it is designed to reseal to keep optimum gas pressure inside of the battery.

Characteristics:

Parameter	Contents
Tensile Strength	> 100 kgf / cm ²
Hardness	60 ± 5 IRHD
Elongation	Min. 300%
Pressure	0.2 – 0.6 kgf / cm ²

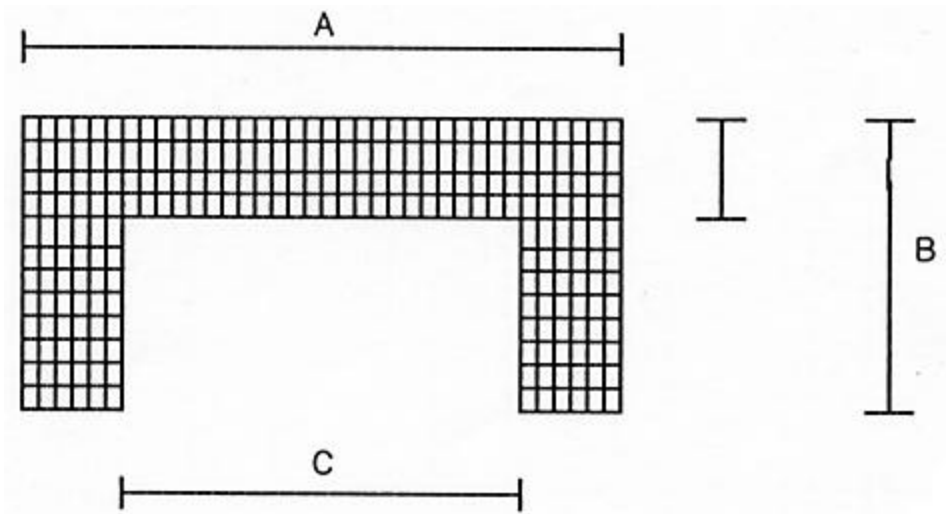

TYPE	A	B	C
Y-76	7.5	4.7	5.2
Y-110	10.5	5.0	7.5
Y-200	16.9	5.8	12.4
Y-250	16.2	6.5	12.8

DIMENSION